
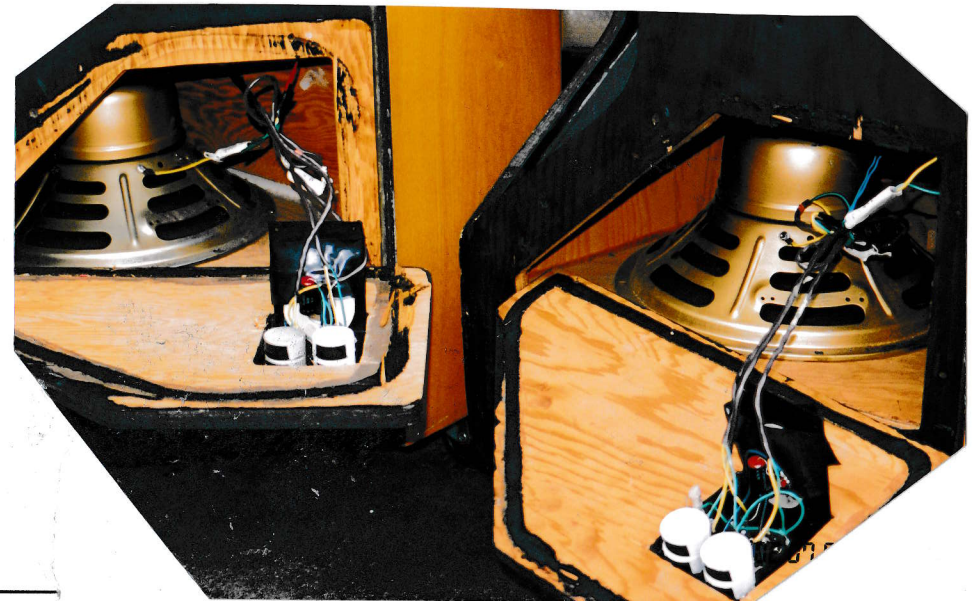
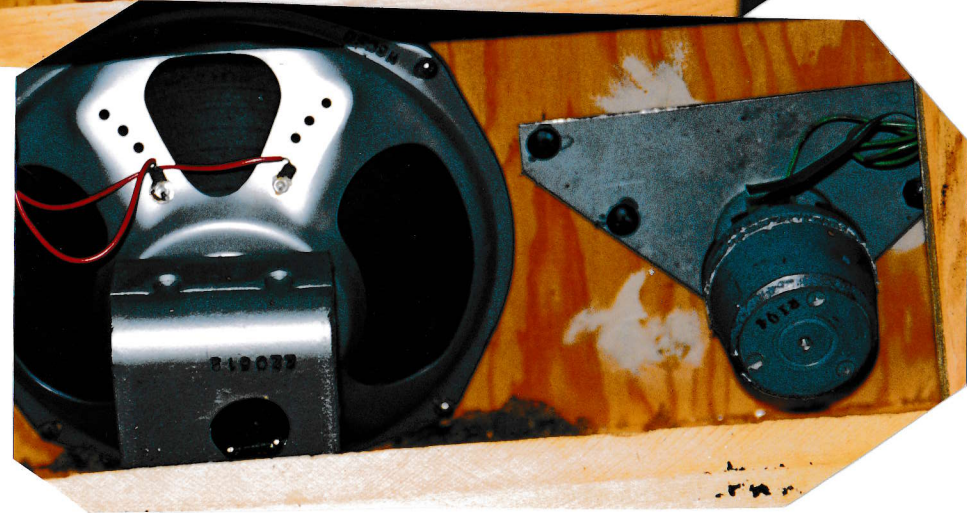




16-2

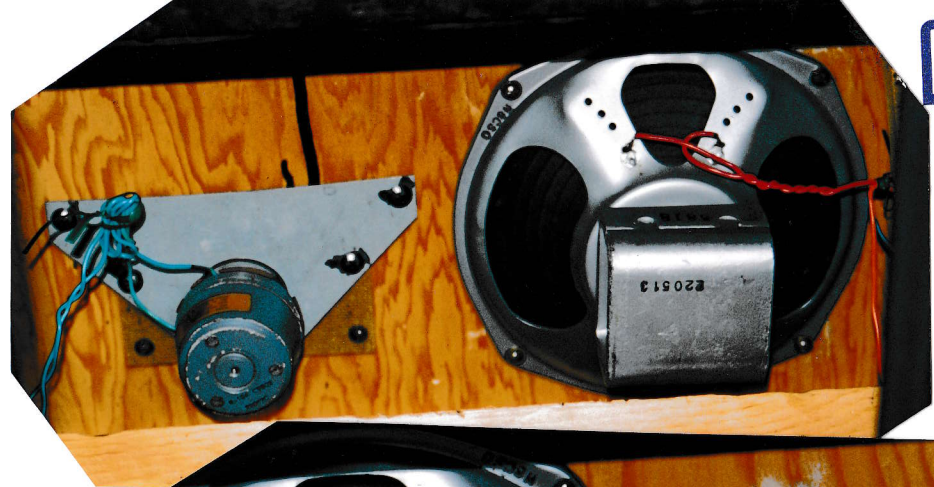

商品番号 161062

Catenoid1010-1246 Oak Original A JENSEN 2
 コーナータイプ リヤロードホーン 30cm 3Way
 P-12LL 220567-220508
 N-8 CSO 220512-220513
 R-104 220620-220621
 M-171 220720-220720

EXTENDED RANGE SPEAKERS



These "Special Series" speakers provide excellent high-fidelity performance up to 10,000 cps. They are designed for home and studio use and will accommodate indoor audiences of the order of 100 people. They are highly qualified for monitoring in broadcast stations, for replacement and modernizing units for FM and television receivers, for radio-phonograph combinations, for wired music and similar applications. Installed in Jensen Bass Reflex cabinets, they provide unusually high-quality reproduction with added octaves of bass response.

For those who wish to construct their own two-way

reproducing systems, we offer these high quality speakers. Coaxial construction need not be employed although any suitable 15" speaker may form the basis of a two-way system with the addition of Q8P h-f speaker, ST-605 Mounting Arms, and A40-1 Network.

No transformers are furnished with these speakers but mounting facilities are provided for easy attachment of matching transformers. See Index. Transformers are shipped separately unless ordered mounted at the factory. There is a minimum charge of \$1.25 list for special speaker designs, including attachment of transformers.

ALNICO 5 PM MODELS

| NOM. SIZE | MODEL NO. | STOCK NO. | SUPER-SEDES | DIMENSIONS, INCHES | | | VOICE COIL | | | TRANSFORMER SIZE | LIST PRICE |
|-----------|-----------|-----------|-------------|--------------------|---------|--------------|------------|--------------|--------------|------------------|------------|
| | | | | O.D. | DEPTH | BAFFLE OPEN. | DIAM., IN. | IMPED., OHMS | POWER, WATTS | | |
| 15" | P15-NH | ST-672 | A15-PM | 15 1/8 | 7 3/16 | 13 3/4 | 1 1/2 | 8 | 16.0 | 1x1" | \$57.25 |
| 12" | P12-NH | ST-674 | A12-PM | 12 1/16 | 6 1/4 | 11 | 1 1/2 | 8 | 14.0 | 1x1" | 51.00 |
| | P12-QH | ST-675 | NONE | 12 1/8 | 6 1/16 | 11 | 1 1/4 | 8 | 12.0 | 7/8x7/8" | 29.25 |
| | P12-SH | ST-127 | PM12-CT | 12 1/8 | 5 5/16 | 11 | 1 | 6-8 | 9.0 | 7/8x7/8" | 18.00 |
| 8" | P8-SH | ST-126 | PM8-CT | 8 1/8 | 3 13/16 | 7 1/8 | 1 | 6-8 | 7.5 | 3/4x3/4" | 14.20 |
| 6" | P6-TH | ST-199 | NONE | 6 11/16 | 3 3/16 | 5 5/8 | 3/4 | 3-4 | 4.5 | 5/8x5/8" | 9.75 |

FIELD COIL MODELS

| NOM. SIZE | MODEL NO. | STOCK NO. | SUPER-SEDES | DIMENSIONS, INCHES | | | VOICE COIL | | | FIELD | | TRANSFORMER SIZE | LIST PRICE |
|-----------|-----------|-----------|-------------|--------------------|---------|--------------|------------|--------------|--------------|--------------|-------------|------------------|------------|
| | | | | O.D. | DEPTH | BAFFLE OPEN. | DIAM., IN. | IMPED., OHMS | POWER, WATTS | RESIST. OHMS | POWER WATTS | | |
| 15" | F15-NH | ST-679 | A-15 | 15 1/8 | 8 5/8 | 13 3/4 | 1 1/2 | 8 | 16.0 | 5300 | 17.0 | 1x1" | \$52.55 |
| 12" | F12-NH | ST-680 | A-12 | 12 1/16 | 7 11/16 | 11 | 1 1/2 | 8 | 14.0 | 5300 | 17.0 | 1x1" | 44.25 |
| | F12-SH | ST-652 | G12-RT | 12 1/8 | 6 1/16 | 11 | 1 | 3-4 | 9.0 | 1500 | 8.5 | 7/8x7/8" | 18.20 |
| | F12-SH | ST-653 | G12-RT | 12 1/8 | 6 1/16 | 11 | 1 | 3-4 | 9.0 | 2500 | 8.5 | 7/8x7/8" | 18.00 |

*Size recommended. See Transformer Listing.

91